


## BT131 Serial Standard TRIACS

### GENERAL DESCRIPTION :

BT131 series triacs with low holding and latching current are especially recommended for use on middle and small resistance type power load.

### Main Features:

<b>I<sub>T(RMS)</sub></b>	<b>V<sub>DRM/V<sub>RRM</sub></sub></b>	<b>V<sub>TM</sub></b>
1 A	600V and 800 V	≤1.7V

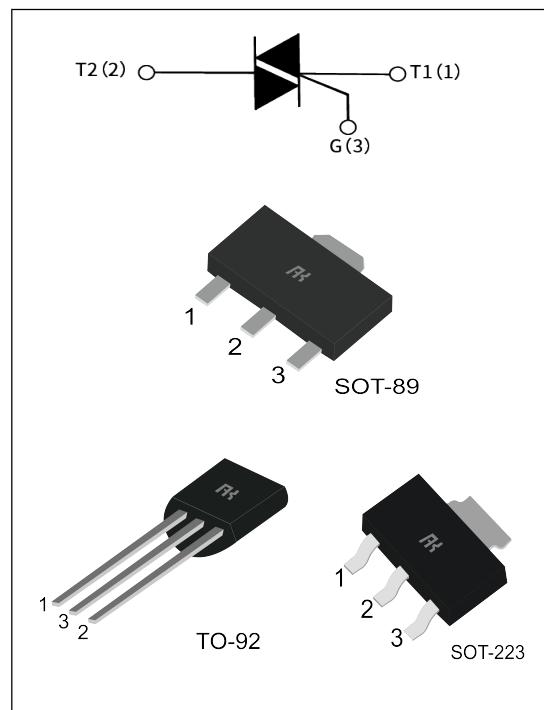

### Absolute Ratings(limiting values) :

Symbol	Parameter		Value	Unit
T <sub>stg</sub>	Storage junction temperature range		- 40 to + 150	°C
T <sub>j</sub>	Operating junction temperature range		- 40 to + 125	°C
I <sub>T(RMS)</sub>	RMS on-state current	TO-92 (TC=51°C)	1	A
		SOT-223/SOT-89 (TC=70°C)		
I <sub>TSM</sub>	Non repetitive surge peak on-state current (full cycle, F=50Hz)		16	A
V <sub>DRM</sub>	Repetitive peak off-state voltage (T <sub>j</sub> =25°C)		600 and 800	V
V <sub>RRM</sub>	Repetitive peak reverse voltage (T <sub>j</sub> =25°C)		600 and 800	V
V <sub>DSM</sub>	Non repetitive surge peak Off-state voltage		V <sub>DRM</sub> + 100	V
V <sub>RSM</sub>	Non repetitive peak reverse voltage		V <sub>RRM</sub> + 100	V
I <sup>2</sup> t	I <sup>2</sup> t value for fusing t <sub>p</sub> = 10 ms		1.28	A <sup>2</sup> s
dI/dt	Critical rate of rise of on-state current (I <sub>G</sub> =2× I <sub>GT</sub> )		10	A/μs
I <sub>GM</sub>	Peak gate current		2	A

<b>P<sub>G(AV)</sub></b>	Average gate power dissipation	0.5	W
<b>P<sub>GM</sub></b>	Peak gate power	5	W

**Electrical Characteristics (T<sub>j</sub>=25°C unless otherwise specified) :**

- **SNUBBERLESS(3 Quadrants)**

<b>Symbol</b>	<b>Test Condition</b>	<b>Quadrant</b>	<b>Range</b>	<b>Value</b>	<b>Unit</b>
				<b>EW</b>	
I <sub>GT</sub>	V <sub>D</sub> =12V R <sub>L</sub> =33Ω	I-II-III	MAX	5	mA
V <sub>GT</sub>		I-II-III	MAX	1.5	V
V <sub>GD</sub>	V <sub>D</sub> =V <sub>DRM</sub> T <sub>j</sub> =125°C R <sub>L</sub> =3.3kΩ	I-II-III	MIN	0.2	V
I <sub>L</sub>	I <sub>G</sub> =1.2 I <sub>GT</sub>	I-III	TYP	5	mA
		II-IV		10	
I <sub>H</sub>	I <sub>T</sub> = 100mA		MAX	7	mA
dV/dt	V <sub>D</sub> =2/3V <sub>DRM</sub> Gate Open T <sub>j</sub> =125°C		MIN	20	V/μs

- **STANDARD(4 Quadrants)**

<b>Symbol</b>	<b>Test Condition</b>	<b>Quadrant</b>	<b>Range</b>	<b>Value</b>	<b>Unit</b>
				<b>E</b>	
I <sub>GT</sub>	V <sub>D</sub> =12V R <sub>L</sub> =33Ω	I-II-III	MAX	5	mA
		IV	MAX	10	
V <sub>GT</sub>		I-II-III-IV	MAX	1.5	V

<b>V<sub>GD</sub></b>	V <sub>D</sub> =V <sub>DRM</sub> T <sub>j</sub> =125°C R <sub>L</sub> =3.3kΩ	I-II-III-IV	MIN	0.2	V
<b>I<sub>L</sub></b>	I <sub>G</sub> =1.2 I <sub>GT</sub>	I-III	TYP	5	mA
		II-IV		10	
<b>I<sub>H</sub></b>	I <sub>T</sub> = 200mA		MAX	7	mA
<b>dV/dt</b>	V <sub>D</sub> = 2/3 V <sub>DRM</sub> Gate Open T <sub>j</sub> = 125°C		MIN	20	V/μs

### STATIC CHARACTERISTICS

Symbol	Parameter			Value(MAX)	Unit
<b>V<sub>TM</sub></b>	I <sub>TM</sub> =1.4A tp= 380μs	T <sub>j</sub> =25°C	MAX	1.7	V
<b>I<sub>DRM</sub> I<sub>RRM</sub></b>	V <sub>D</sub> =V <sub>DRM</sub> , V <sub>R</sub> =V <sub>RRM</sub>	T <sub>j</sub> =25°C	MAX	10	μ A
		T <sub>j</sub> =125°C		500	

### Thermal Resistances :

Symbol	Parameter		Value	Unit
<b>R<sub>th(j-c)</sub></b>	junction to case(AC)	TO-92	60	°C/W
		SOT-89/SOT-223	23	

### Ordering Information:

BT 131 - 600 E TRIAC SERIES I <sub>T(RMS)</sub> :1A	E: IGT <sub>1-3</sub> ≤ 10mA STANDARD EW:IGT <sub>1-3</sub> ≤ 10mA SNUBBERLESS 600:V <sub>DRM</sub> /V <sub>RRM</sub> ≥ 600 800:V <sub>DRM</sub> /V <sub>RRM</sub> ≥ 800
---	---

Fig.1: Maximum power dissipation versus RMS on-state current

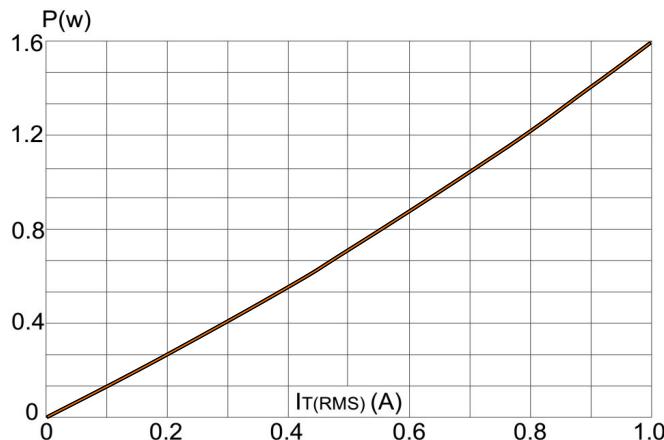


Fig.2 : RMS on-state current versus case temperature

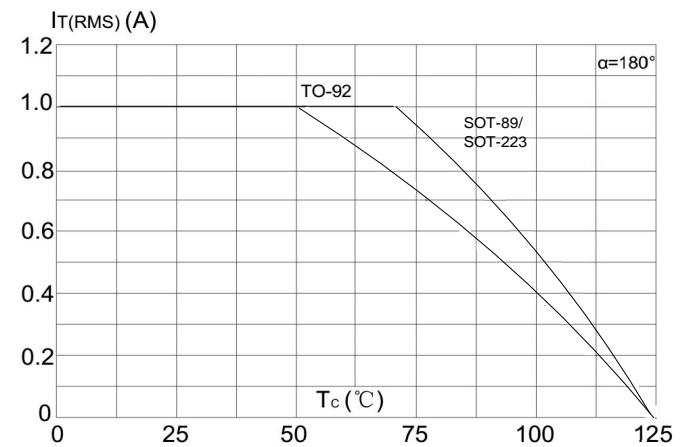


Fig.3 : Surge peak on-state current versus number of cycles

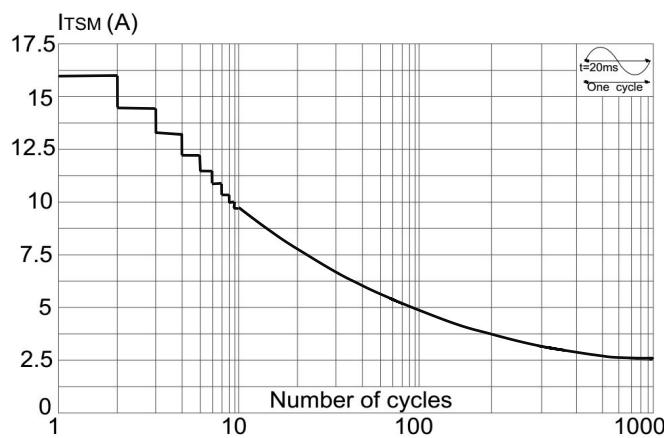


Fig.4 : On-state characteristics (maximum values)

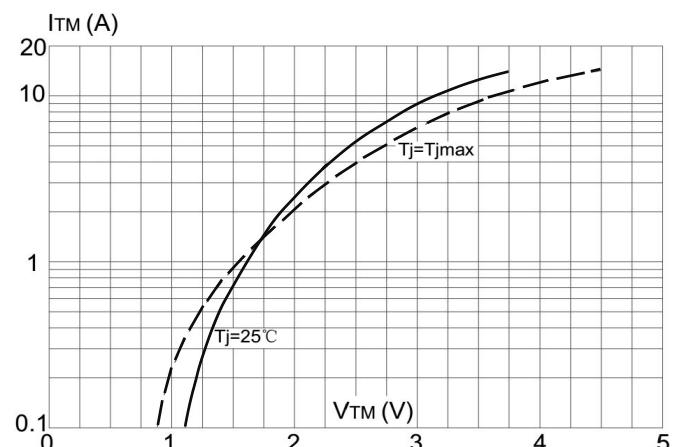


Fig.5:Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 20\text{ms}$  and corresponding value of  $I^2 t$  ( $dI/dt < 10\text{A}/\mu\text{s}$ )




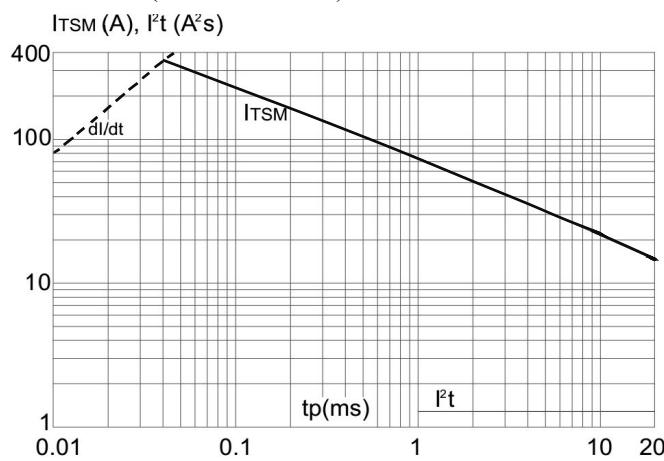


Fig.6: Relative variations of gate trigger current versus junction temperature

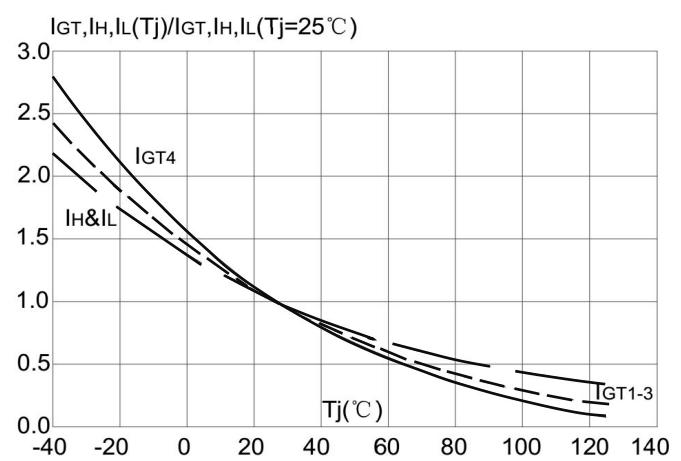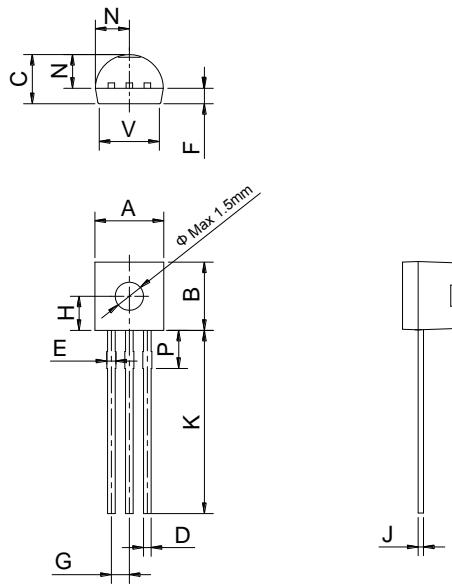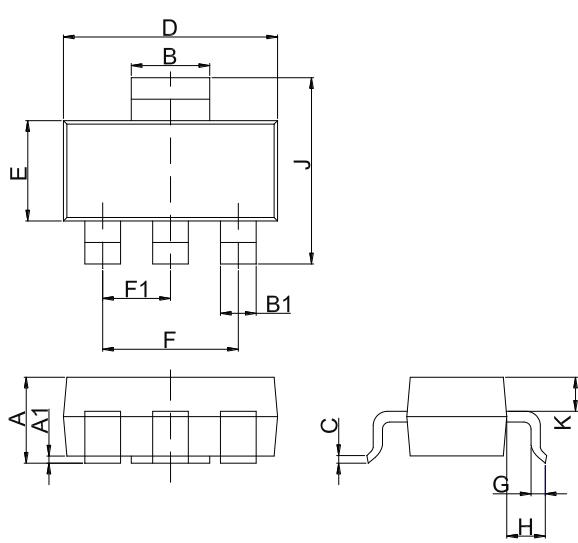


**Package Mechanical Data :**
**Unit:mm**
**TO-92**


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.45		5.20	0.175		0.205
B	4.32		5.33	0.170		0.210
C	3.18		4.19	0.125		0.165
D	0.407		0.533	0.016		0.021
E	0.60		0.80	0.024		0.031
F	-	1.1	-	-	0.043	-
G	-	1.27	-	-	0.050	-
H	-	2.30	-	-	0.091	-
J	0.36		0.50	0.014		0.020
K	12.70		15.0	0.500		0.591
N	2.04		2.66	0.080		0.105
P	1.86		2.06	0.073		0.081
V	-		4.3	-		0.169

**SOT-223**


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.5	1.6	1.8	0.059	0.063	0.071
A1	0	0.06	0.10	0	0.002	0.004
B	2.9	3.0	3.1	0.114	0.118	0.122
B1	0.6	0.7	0.8	0.024	0.028	0.031
C	0.22	0.26	0.32	0.009	0.010	0.013
D	6.3	6.5	6.7	0.248	0.256	0.264
E	3.3	3.5	3.7	0.130	0.138	0.146
F		4.6			0.181	
F1		2.3			0.091	
G	0.7	0.9	1.1	0.028	0.035	0.043
H	1.5	1.75	2.0	0.059	0.069	0.079
J	6.7	7.0	7.3	0.264	0.276	0.287
K	0.8	0.9	1.0	0.031	0.035	0.039

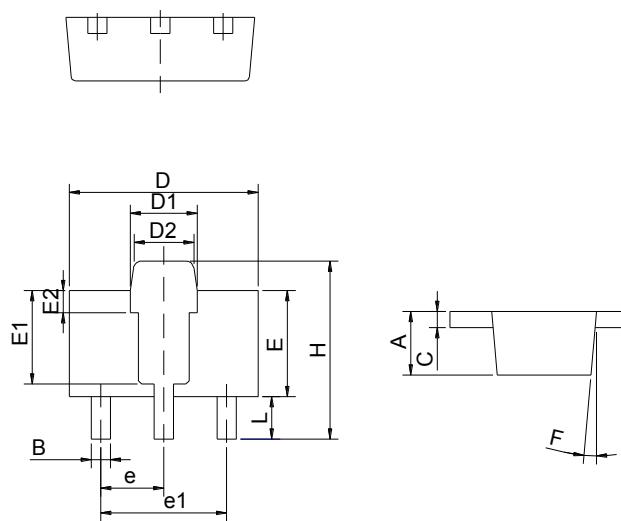**SOT-89**


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.40		1.60	0.055		0.063
B	0.40		0.52	0.016		0.020
C	0.35		0.41	0.014		0.016
D	4.40		4.60	0.173		0.181
D1	1.50		1.70	0.059		0.067
D2	1.30		1.50	0.051		0.059
E	2.40		2.60	0.094		0.102
E1		2.20			0.087	
E2		0.52			0.020	
e		1.50			0.059	
e1		3.00			0.118	
F		5°			0.197°	
H	4.05		4.25	0.159		0.167
L	0.89		1.20	0.035		0.047