


## BTB20 Serial Standard TRIACS

### GENERAL DESCRIPTION:

High current density due to double mesa technology;  
 Glass Passivation. BTB20 series TRIACS are suitable for general purpose AC switching. They can be used as an ON/OFF Function in applications such as static relays, heating regulation, induction motor starting circuits..or for phase control operation light dimmers, motor speed controllers, etc.

### Main Features:

<b>I<sub>T(RMS)</sub></b>	<b>V<sub>DRM/V<sub>RRM</sub></sub></b>	<b>V<sub>TM</sub></b>
20 A	600V 800V	$\leq 1.55$ V

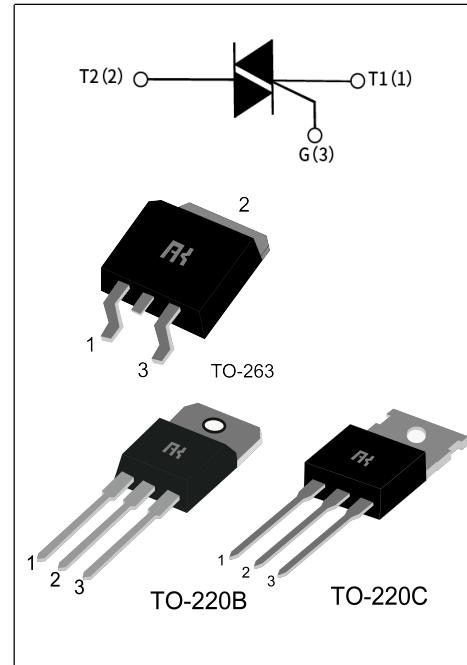

### Absolute Ratings(limiting values) :

<b>Symbol</b>	<b>Parameter</b>		<b>Value</b>	<b>Unit</b>
<b>T<sub>stg</sub></b>	Storage junction temperature range		- 40 to + 150	°C
<b>T<sub>j</sub></b>	Operating junction temperature range		- 40 to + 125	°C
<b>I<sub>T(RMS)</sub></b>	RMS on-state current	TO-220BC(Non-Ins) (TC=90°C)	20	A
		TO-263 (TC=65°C)		
<b>I<sub>TSM</sub></b>	Non repetitive surge peak on-state current (tp=10ms)		200	A
<b>V<sub>DRM</sub></b>	Repetitive peak off-state voltage(Tj =25°C)		600/800	V
<b>V<sub>RRM</sub></b>	Repetitive peak reverse voltage(Tj =25°C)		600/800	V
<b>V<sub>DSM</sub></b>	Non repetitive surge peak Off-state voltage		V <sub>DRM</sub> + 100	V
<b>V<sub>RSM</sub></b>	Non repetitive peak reverse voltage		V <sub>RRM</sub> + 100	V
<b>I<sup>2</sup>t</b>	I <sup>2</sup> t value for fusing tp = 10 ms		200	A <sup>2</sup> s
<b>dI/dt</b>	Critical rate of rise of on-state current (I <sub>G</sub> =2×I <sub>GT</sub> )		100	A/μs

<b>I<sub>GM</sub></b>	Peak gate current	4	A
<b>P<sub>G(AV)</sub></b>	Average gate power dissipation	1	W
<b>P<sub>GM</sub></b>	Peak gate power	10	W

**Electrical Characteristics : (T<sub>j</sub>=25°C unless otherwise specified)**

<b>Symbol</b>	<b>Test Condition</b>	<b>Quadrant</b>	<b>Range</b>	<b>V<sub>DRM</sub> / V<sub>RRM</sub>:</b>		<b>V<sub>DRM</sub> / V<sub>RRM</sub>:</b>	<b>Unit</b>
				<b>B</b>	<b>C</b>		
<b>I<sub>GT</sub></b>	V <sub>D</sub> =12V R <sub>L</sub> =33Ω	I-II-III	MAX	50	35	50	mA
<b>V<sub>GT</sub></b>		I-II-III	MAX	1.5			V
<b>V<sub>GD</sub></b>	V <sub>D</sub> =V <sub>DRM</sub> R <sub>L</sub> =3.3kΩ T <sub>j</sub> =125°C	I-II-III	MIN	0.2			V
<b>I<sub>L</sub></b>	I <sub>G</sub> =1.2 I <sub>GT</sub>	I-III	MAX	70	50	80	mA
		II		80	60	100	
<b>I<sub>H</sub></b>	I <sub>TM</sub> = 100mA		MAX	60	40	70	mA
<b>dV/dt</b>	V <sub>D</sub> =2/3V <sub>DRM</sub> Gate Open T <sub>j</sub> =125°C		MIN	500	250	200	V/μs
<b>(dV/dt)c</b>	(dI/dt)c=8.8A/ms T <sub>j</sub> =125°C		MIN	12.5	7	7	V/μs

### Static Characteristics

<b>Symbol</b>	<b>Parameter</b>		<b>Value(MAX)</b>	<b>Unit</b>
<b>V<sub>TM</sub></b>	I <sub>TM</sub> =28A tp= 380μs		T <sub>j</sub> =25°C	1.55
<b>I<sub>DRM</sub></b> <b>I<sub>RRM</sub></b>	V <sub>D</sub> =V <sub>DRM</sub> , V <sub>R</sub> =V <sub>RRM</sub>	T <sub>j</sub> =25°C	5	μ A mA
		T <sub>j</sub> =125°C	2.5	

### Thermal Resistances :

<b>Symbol</b>	<b>Parameter</b>		<b>Value</b>	<b>Unit</b>
<b>R<sub>th(j-c)</sub></b>	Junction to case for AC	TO-263	2.5	°C/W
		TO-220BC(Non-Ins)	1.1	

Fig.1: Maximum power dissipation versus RMS on-state current

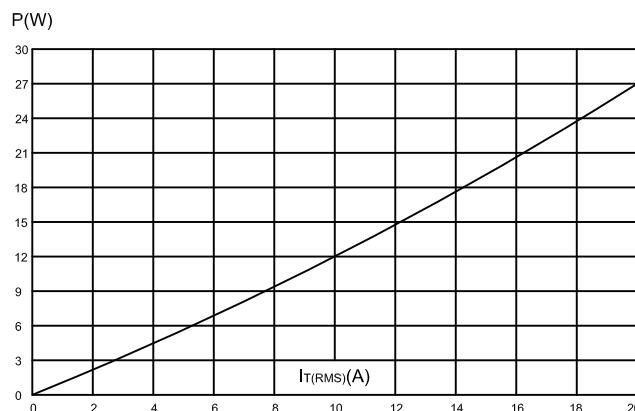


Fig.2 : RMS on-state current versus case temperature

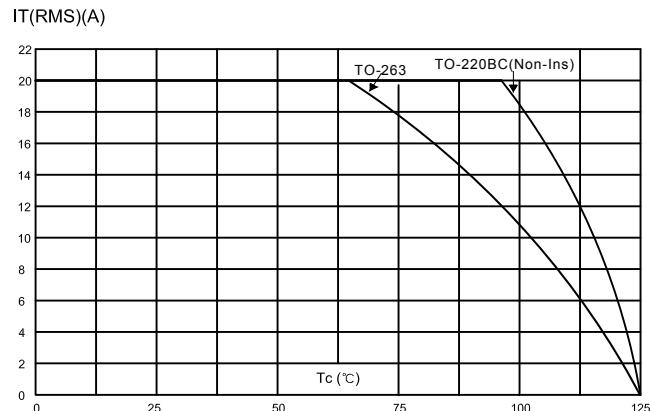


Fig.3 : Surge peak on-state current versus number of cycles

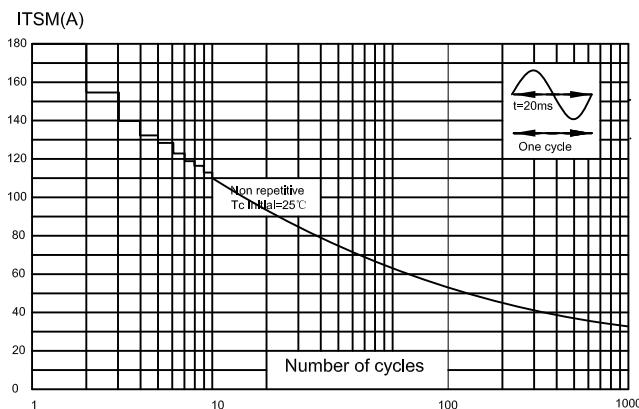


Fig.4 : On-state characteristics (maximum values)

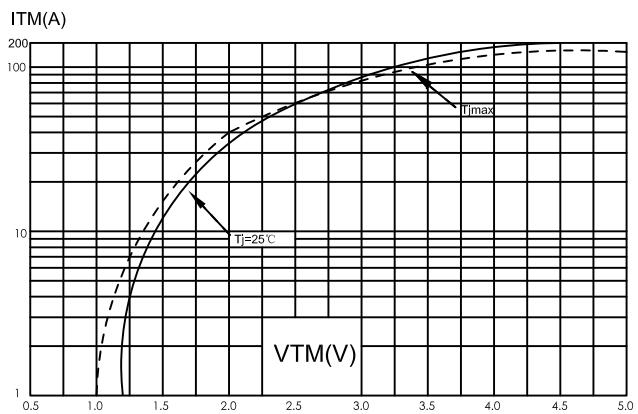


Fig.5 : Non-repetitive surge peak on-state current for a sinusoidal pulse with width tp<20ms and corresponding value of I<sub>t</sub> (dI/dt <100A/μs)



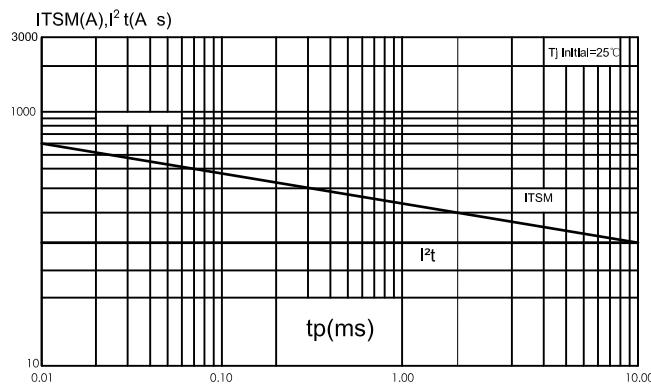


Fig.6: Relative variations of gate trigger current,holding current and latching current versus unction temperature

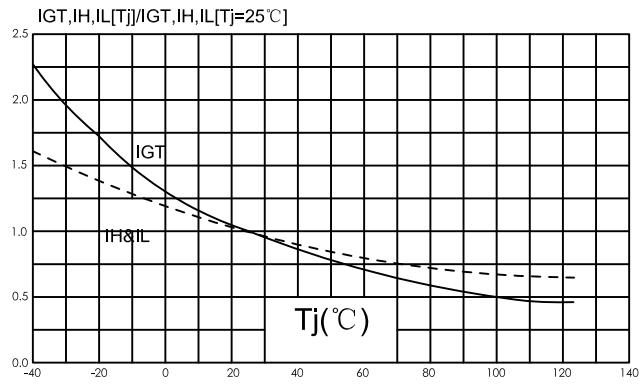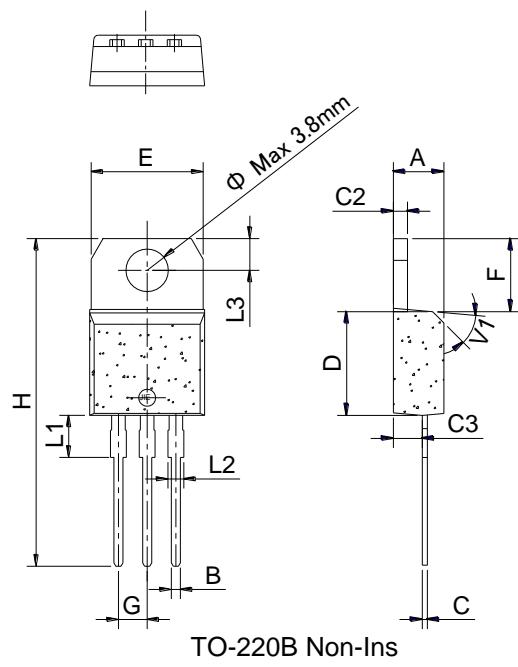


**Ordering Information:**


BT A 20 - 600 B TRIAC SERIES A:insulated B:non-insulated $I_{T(RMS)}:20A$	IGT Class $600:V_{DRM}/V_{RRM} \geq 600$ $800:V_{DRM}/V_{RRM} \geq 800$
---	---

**Package Mechanical Data :**


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.60		10.4	0.378		0.409
F	6.20		6.60	0.244		0.260
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

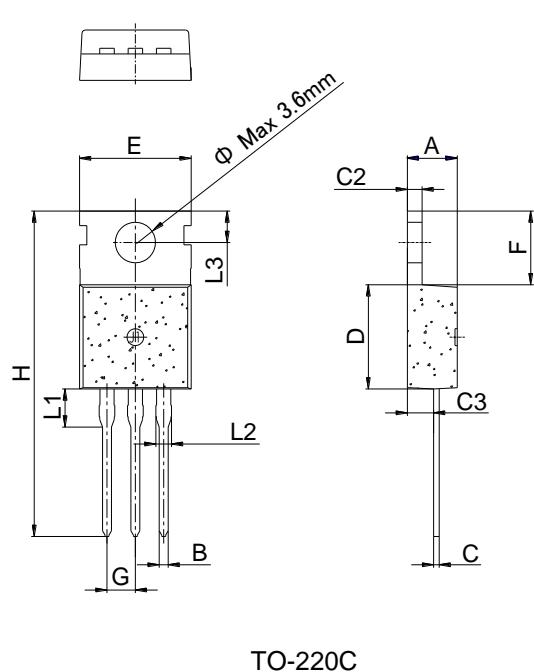

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.70		0.90	0.028		0.035
C	0.45		0.60	0.018		0.024
C2	1.23		1.32	0.048		0.052
C3	2.20		2.60	0.087		0.102
D	8.90		9.90	0.350		0.390
E	9.90		10.3	0.390		0.406
F	6.30		6.90	0.248		0.272
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.39			0.133	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
Φ		3.6			0.142	

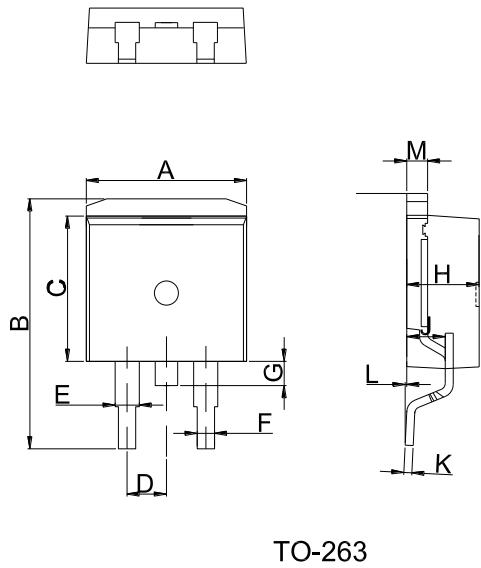

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.4		9.6	0.37		0.378
D		2.54			0.100	
E	1.20		1.40	0.047		0.055
F	0.75		0.85	0.029		0.033
G			1.75			0.069
H	4.40		4.70	0.173		0.185
J	2.30		2.70	0.091		0.106
K	0.38		0.55	0.015		0.022
L	0	0.10	0.25	0	0.004	0.010
M	1.25		1.35	0.049		0.053