

1200V 65mΩ N-Channel SiC Power MOSFET

Description


The AKCT65N120Q7L is a high blocking voltage N-Channel SiC power MOSFET. This device provide excellent performance for high voltage power supplies or pulse circuits.

Features

- Typical on-Resistance: $R_{DS(on)}=65\text{m}\Omega(\text{typ.})$
- High Blocking Voltage
- 100% Avalanche Test
- Good Stability and Uniformity with High E_{AS}

Applications

- Solar Inverters
- High Voltage DC/DC Converters
- Motor Drivers
- Switch Mode Power Supplies

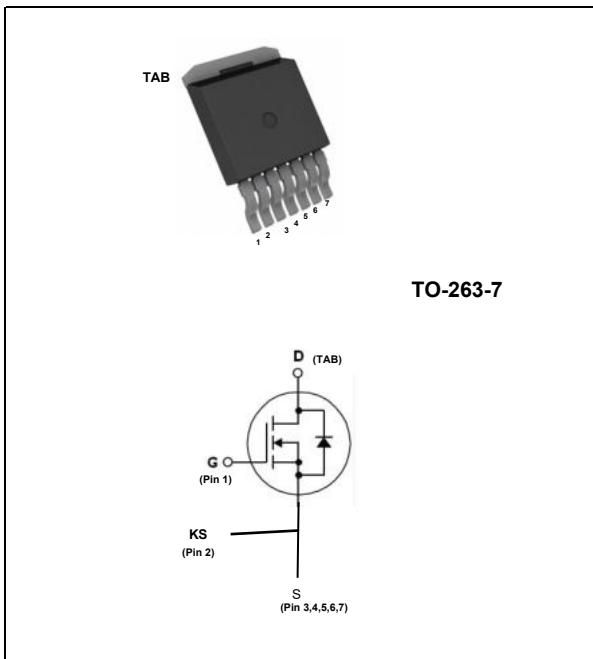

Absolute Maximum Ratings @ $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Ratings	Unit	
V_{DSS}	Drain to Source Voltage	1200	V	
V_{GSS}	Gate to Source Voltage	-10/+25	V	
V_{GSop}	Recommended operation Values of Gate -Source Voltage	-5/+20	V	
I_D	Drain Current	$T_c=25^\circ\text{C}$	36	A
		$T_c=100^\circ\text{C}$	24	A
I_{DM}	Pulsed Drain Current (Note1)	80	A	
P_D	Maximum Power Dissipation	$T_c=25^\circ\text{C}$	75	W
	Derate above 25°C		0.5	W/°C
E_{AS}	Single Pulsed Avalanche Energy (Note 2)	722	mJ	
T_J	Operating Junction Temperature Range	-40~+175	°C	
T_{STG}	Storage Temperature Range	-40~+175	°C	

Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	2.0	°C/W
$R_{th(J-A)}$	Thermal Resistance, Junction to Ambient	40	°C/W

Electrical Characteristics @ $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain to Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_D=100\mu\text{A}$	1200	-	-	V
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_D=15\text{mA}$	2.0	3.5	4.7	V
$R_{\text{DS(on)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=20\text{V}, I_D=20\text{A}$	-	65	85	$\text{m}\Omega$
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}}=V_{\text{DSS}}, V_{\text{GS}}=0\text{V}$	-	-	100	μA
I_{GSS}	Gate to Source Leakage Current	$V_{\text{GS}}=V_{\text{GSS}}, V_{\text{DS}}=0\text{V}$	-	-	± 500	nA

D-S Diode Characteristics and Maximum Rating @ $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{SD}	Drain-Source Diode Forward Voltage	$V_{\text{GS}}=0\text{V}, I_S=10\text{A}$	-	3.6	-	V
t_{rr}	Reverse Recovery Time	$V_{\text{GS}}=0\text{V}, I_S=20\text{A}, \frac{dI}{dt}=-1000\text{A}/\mu\text{s}$	-	40	-	ns
Q_{rr}	Reverse Recovery Charge		-	110	-	nC

Switching Characteristics @ $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$t_{\text{d(on)}}$	Turn-on Delay Time	$I_D=20\text{A}, V_{\text{DD}}=800\text{V}, R_G=2.5\Omega, V_{\text{GS}}=-5/20\text{V}, (\text{Note 3})$	-	21	-	ns
t_r	Turn-on Rise Time		-	22	-	ns
$t_{\text{d(off)}}$	Turn-off Delay Time		-	89	-	ns
t_f	Turn-off Fall Time		-	42.5	-	ns
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=800\text{V}, f=1.0\text{MHz}$	-	1855	-	pF
C_{oss}	Output Capacitance		-	166	-	pF
C_{rss}	Reverse Transfer Capacitance		-	30.6	-	pF
Q_g	Total Gate Charge	$I_D=20\text{A}, V_{\text{DD}}=800\text{V}, V_{\text{GS}}=-5/20\text{V}, (\text{Note 3})$	-	144	-	nC
Q_{gs}	Gate to Source Charge		-	38.8	-	nC
Q_{gd}	Gate to Drain Charge		-	32	-	nC

Note:

1. Repetitive rating: pulse-width limited by maximum junction temperature
2. $V_{\text{DD}}=100\text{V}, L=5\text{mH}, V_{\text{clamp}}=1700\text{V}, V_G=10\text{V}, I_D=17.0\text{A}$
3. Essentially independent of operating temperature typical characteristics

Typical Performance Characteristics

Fig. 1. Typical on-Resistance Characteristics

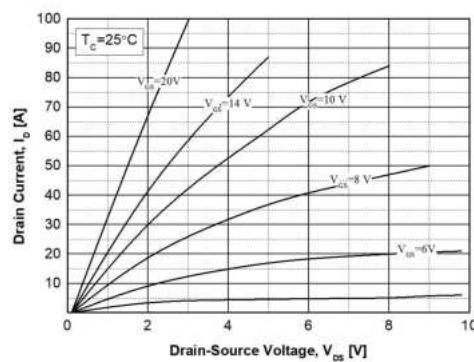


Fig. 2. Normalized On-Resistance vs. Drain Current and Gate Voltage

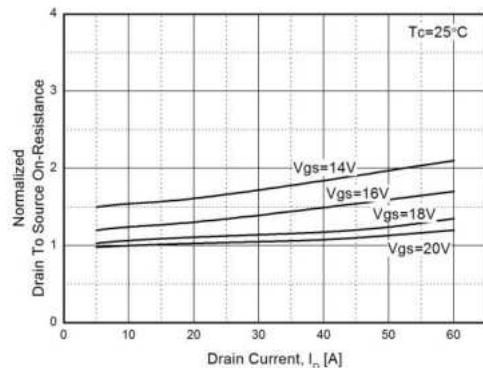


Fig. 3. Normalized On-Resistance vs. Junction Temperature

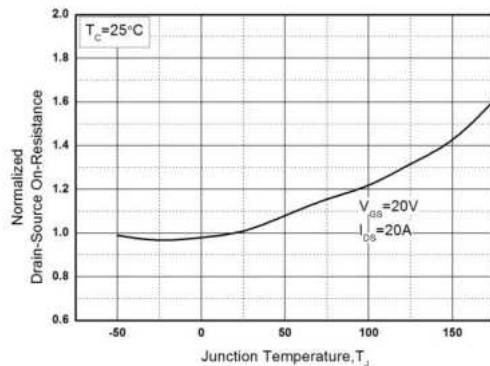


Fig. 4. On-Resistance vs. Gate-to-source Voltage

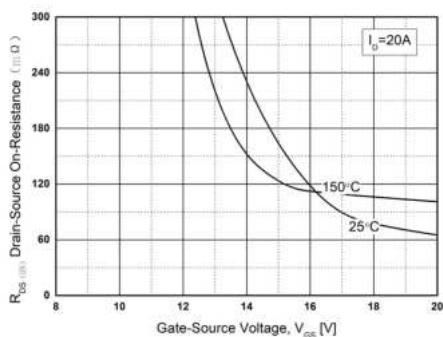


Fig. 5. Transfer Characteristics


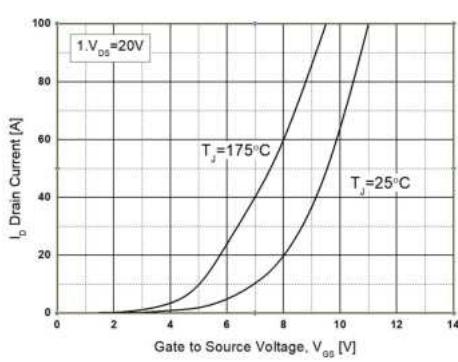


Fig. 6. Source-to-Drain Diode Forward Voltage vs. Source Current

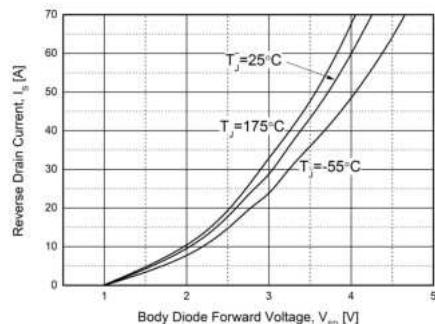

Typical Performance Characteristics

Fig. 7. Gate Charge Characteristics

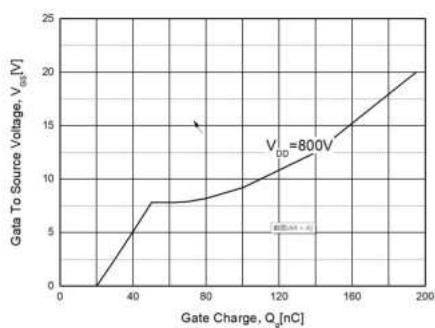


Fig. 8. Characteristics vs. Drain-to-Source Voltage


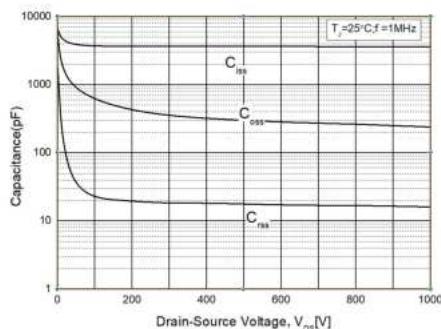


Fig. 9. Maximum Drain Current vs. Temperature

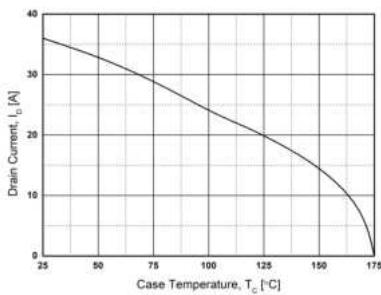

Package Dimensions

TO-263

(Dimensions in Millimeters)

