

60A, 600V Hyperfast Single Diode

Description

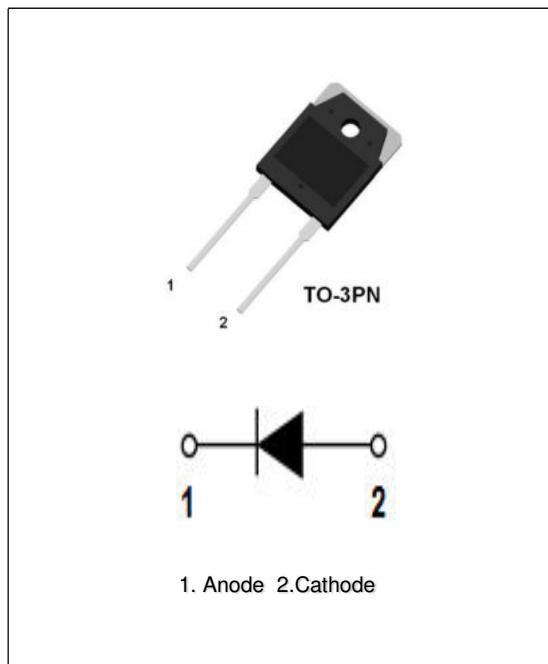
The AKF60H60SN is an hyperfast single diode with low forward voltage drop. This device is designed for Inversion Welder and UPS, It is specially suited for use in Converter & Chopper and industrial applications as SMPS.

Features

- Hyperfast Soft Recovery: $t_{rr}=40\text{ns}$ (typ.)
- Typical Forward Voltage: $V_F=1.75\text{V}$ @ $I_F=60\text{A}$
- Reverse Voltage: $V_{RRM}=600\text{V}$
- Avalanche Energy Rated

Applications

- Inversion Welder
- Converter & Chopper
- Rectifiers In Switch Mode Power Supplies



Absolute Maximum Ratings

per diode at $T_C=25\text{ }^\circ\text{C}$ unless otherwise noted

Symbol	Parameter		Ratings	Unit
V_{RRM}	Peak Repetitive Reverse Voltage		600	V
V_{RWM}	Working Peak Reverse Voltage		600	V
V_R	DC Blocking Voltage		600	V
$I_{F(AV)}$	Average Rectified Forward Current	per device at $T_C=120\text{ }^\circ\text{C}$	60	A
I_{FSM}	Non-repetitive Peak Surge Current		600	A
T_J	Operating Junction Temperature Range		-40~+150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		-40~+150	$^\circ\text{C}$

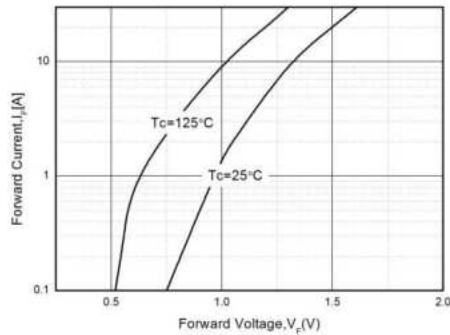
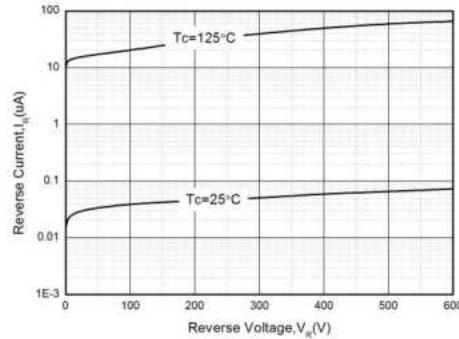
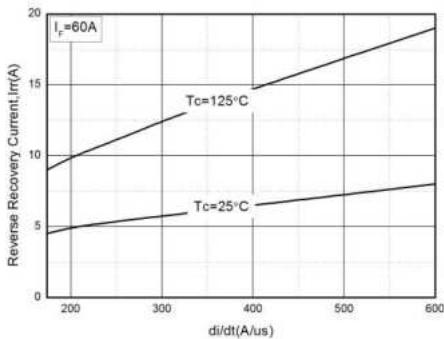
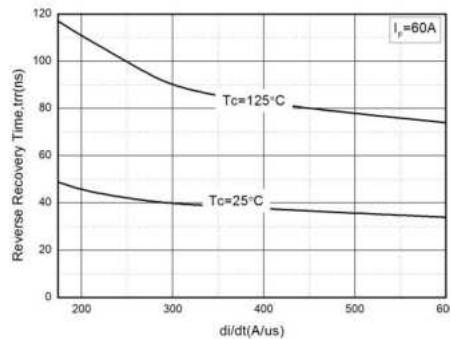
Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	0.7	$^\circ\text{C}/\text{W}$

Electrical Characteristics per diode @ $T_C=25\text{ }^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_F	Forward Voltage Drop	$I_F=60\text{A}$	-	1.75	1.85	V
		$I_F=60\text{A}, T_C=125\text{ }^\circ\text{C}$	-	-	1.5	V
I_R	Reverse Leakage Current	$V_R=600\text{V}$	-	-	1000	nA
t_{rr}	Reverse Recovery Time	$I_F=60\text{A}, \text{di/dt}=-200\text{A/us}$	-	40	-	ns
W_{AVL}	Avalanche Energy	$L=30\text{mH}$	20	-	-	mJ

Typical Performance Characteristics

 Fig. 1. Typical Characteristics: V_F vs. I_F

 Fig. 2. Typical Characteristics: V_R vs. I_R

 Fig. 3. Typical Reverse Recovery Time vs. di/dt

 Fig. 4. Typical Reverse Recovery Current vs. di/dt


Package Dimensions

TO-3PN

(Dimensions in Millimeters)

