

600V FRD Full Bridge Module


Description

The Fast Recovery Diode module devices used Full Bridge Structure, and optimized to reduce losses and EMI/RFI in high frequency power conditioning electrical systems.

The Fast Recovery Diode module is ideally suited for power converters, inverter welders, motor drives and other applications where switching losses are significant portion of the total losses.

Features

- Repetitive Reverse Voltage: $V_{RRM} = 600V$
- Low Forward Voltage: $V_F(\text{typ.}) = 1.3V @ I_F=100A$
- Average Forward Current: $I_{F(AV)} = 100A @ T_C=100^\circ\text{C}$
- Reverse Recovery Time: $t_{rr}(\text{typ.}) = 90\text{ns}$
- Extensive Characterization of Recovery Parameters
- Reduced EMI and RFI
- Isolation Type Package
- 150°C Operating Junction Temperature
- Built-in Full Bridge FRD Construction

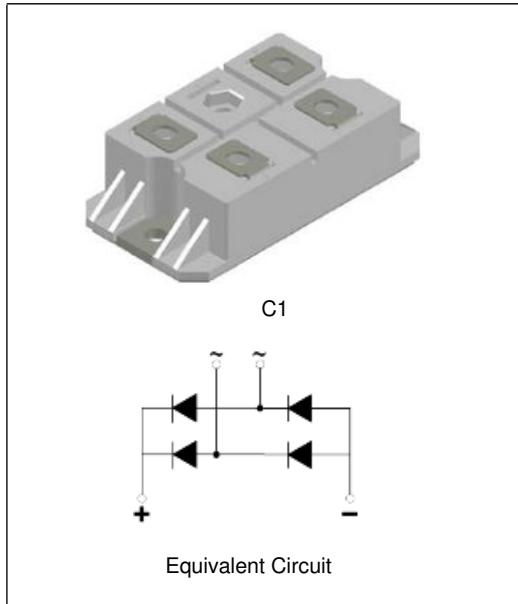

Applications

- High Speed & High Power Converters, Inverter Welders
- Various Switching and Telecommunication Power Supply
- Cutting Machine

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter			Ratings	Unit
V_{RRM}	Repetitive Peak Reverse Voltage			600	V
V_R	DC Blocking Voltage			480	V
$I_{F(AV)}$	Average Rectified Forward Current	Per Diode	$T_C = 25^\circ\text{C}$	200	A
			$T_C = 100^\circ\text{C}$	100	
	Per Package	$T_C = 25^\circ\text{C}$	800		
		$T_C = 100^\circ\text{C}$	400		
I_{FSM}	Non-repetitive Peak Surge Current (Per Diode) 60Hz Single Half-sine Wave			1750	A
I^2t	I^2t For Fusing 60Hz Sine Wave			$12.7 * 10^3$	A^2s
P_D	Maximum Power Dissipation			360	W
V_{iso}	Isolation Voltage @AC 1 Minutes			2500	V
T_J	Junction Temperature			-55 ~ +150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range			-55 ~ +150	$^\circ\text{C}$
	Mounting Torque (M5)			4.0	N.m
	Terminal Torque (M5)			2.0	N.m
	Weight			137	g

Electrical Characteristics (Per Diode, $T_C=25\text{ }^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_F	Forward Voltage Drop	$I_F=100\text{A}$	-	1.3	1.8	V
		$I_F=100\text{A}, T_C=100\text{ }^\circ\text{C}$	-	1.15	-	V
I_{RM}	Reverse Leakage Current	$V_R=600\text{V}$	-	-	0.5	mA
		$V_R=600\text{V}, T_C=100\text{ }^\circ\text{C}$	-	-	1	mA
t_{rr}	Reverse Recovery Time	$I_F=1\text{A}, di/dt=-200\text{A/us}$	-	35	-	ns
t_{rr}	Reverse Recovery Time	$I_F=100\text{A}, di/dt=-200\text{A/us}$	-	90	120	ns
I_{rr}	Reverse Recovery Current		-	11	-	A
t_{rr}	Reverse Recovery Time	$I_F=100\text{A}, di/dt=-200\text{A/us}, T_C=100\text{ }^\circ\text{C}$	-	210	-	ns
I_{rr}	Reverse Recovery Current		-	23	-	A

Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	0.34	$^\circ\text{C/W}$

Typical Performance Characteristics

Fig. 1. Typical Characteristics: V_F vs. I_F

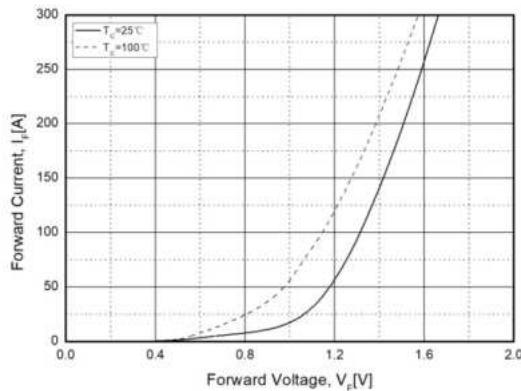


Fig. 2. Typical Reverse Recovery Time vs. di/dt

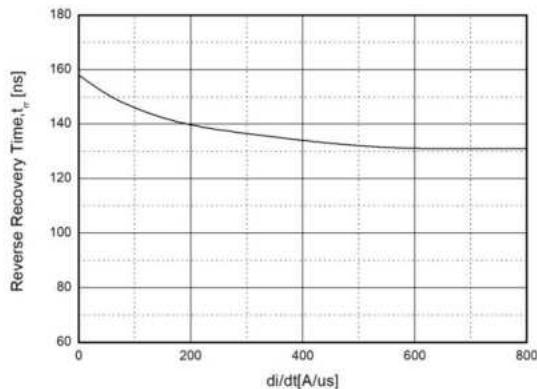


Fig. 3. Transient Thermal Impedance Characteristics ($R_{th(J-C)}$)


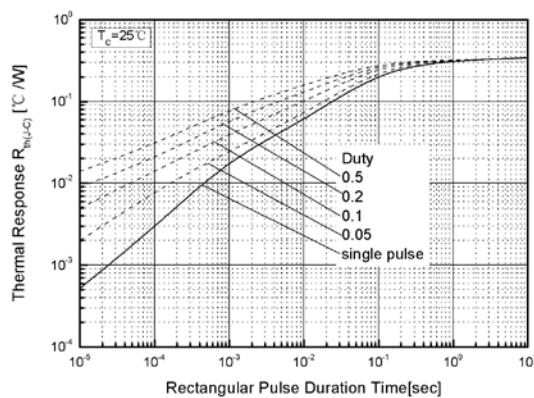


Fig. 4. Forward Current Derating Curve



Package Dimensions

C1

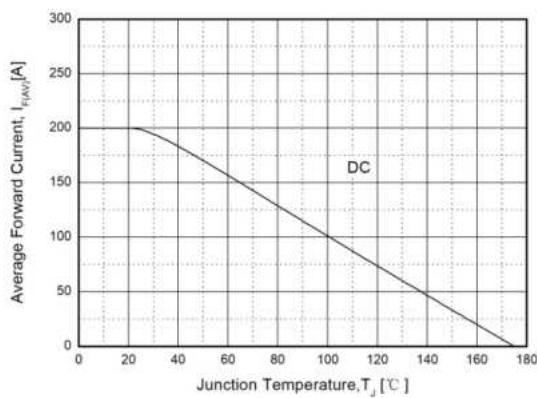

(Dimensions in Millimeters)

