

Product Manual

EKWIN ELECTRONICS CO.,LTD

EK BTB60

www.ekwin.net


Standard TRIACS

BTB60 Serial

Main Features:

I_{T(RMS)}	V_{DRM/V_{RRM}}	V_{TM}
60 A	600V	≤ 1.5 V
	800V	
	1200V	
	1600 V	

Description:

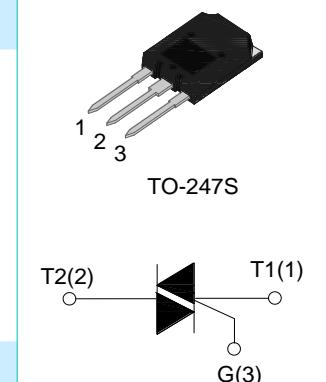

High current density due to double mesa technology; Glass Passivation.BTB60series TRIACS is suitable for general purpose AC switching.they can be used as an ON/OFF Function in applications such as static relays,heating regulation,induction motor stating circuits..or for phase control operation light dimmers,motor speed controllers.

Absolute Ratings(limiting values) :

Symbol	Parameter		Value	Unit
T_{stg}	Storage junction temperature range		- 40 to + 150	°C
T_j	Operating junction temperature range		- 40 to + 125	°C
I_{T(RMS)}	RMS on-state current	TO-247S (TC=75°C)	60	A
I_{TSM}	Non repetitive surge peak on-state current (tp=10ms)		550	A
V_{DRM}	Repetitive peak off-state voltage(Tj =25°C)		600/800/1200/1600	V
V_{RRM}	Repetitive peak reverse voltage(Tj =25°C)		600/800/1200/1600	V
V_{DSM}	Non repetitive surge peak Off-state voltage		V _{DRM} + 100	V
V_{RSM}	Non repetitive peak reverse voltage		V _{RRM} + 100	V
I²t	I ² t value for fusing tp = 10 ms		1500	A ² s
dI/dt	Critical rate of rise of on-state current (I _G =2 × I _{GT})		100	A/μs

I_{GM}	Peak gate current	8	A
P_{G(AV)}	Average gate power dissipation	2	W
P_{GM}	Peak gate power	10	W

Electrical Characteristics : (T_j=25°C unless otherwise specified)

Symbol	Test Condition	Quadrant	Range	Value	Unit
I_{GT}	V _D =12V R _L =33Ω	I-II-III	MAX	50	mA
V_{GT}		I-II-III	MAX	1.3	V
V_{GD}	V _D =V _{DRM} R _L =3.3kΩ T _j =125°C	I-II-III	MIN	0.2	V
I_L	I _G =1.2 I _{GT}	I-III	MAX	80	mA
		II		120	
I_H	I _{TM} = 100mA		MAX	60	mA
dV/dt	V _D =2/3V _{DRM} Gate Open T _j =125°C		MIN	1000	V/μs
(dV/dt)c	Without snubber T _j =125°C		MIN	20	V/μs

Static Characteristics

Symbol	Parameter		Value(MAX)	Unit
V_{TM}	I _{TM} =80A tp= 380μs	T _j =25°C	1.55	V
I_{DRM} I_{RRM}	V _D =V _{DRM} , V _R =V _{RRM}	T _j =25°C	50	μ A mA
		T _j =125°C	8	

Thermal Resistances :

Symbol	Parameter		Value	Unit
R_{th(j-c)}	Junction to case for AC	TO-247S	0.45	°C/W

Fig.1: Maximum power dissipation versus RMS on-state current

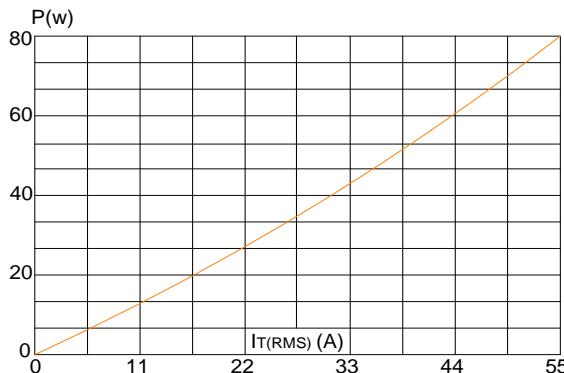


Fig.2 : RMS on-state current versus case temperature

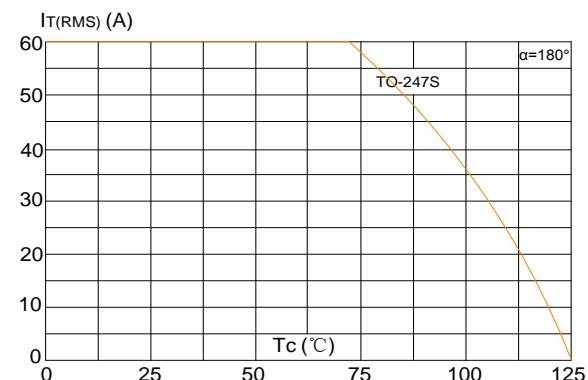


Fig.3 : Surge peak on-state current versus number of cycles

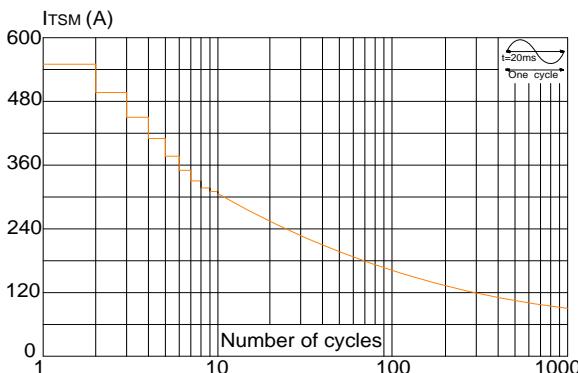


Fig.4 : On-state characteristics (maximum values)

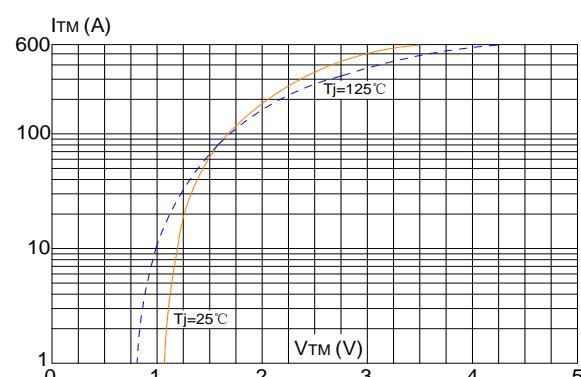


Fig.5 : Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20\text{ ms}$ and corresponding value of I_t ($dI/dt < 100\text{ A}/\mu\text{s}$)



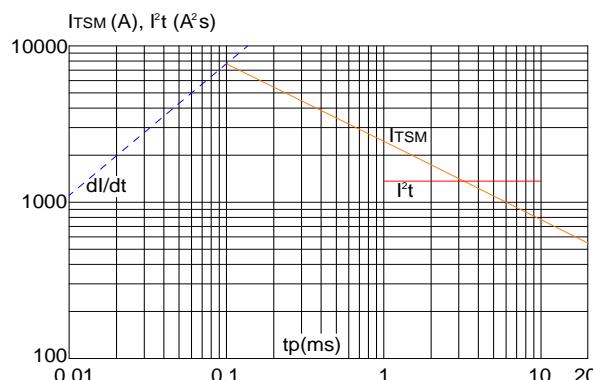


Fig.6: Relative variations of gate trigger current, holding current and latching current versus unclipping temperature

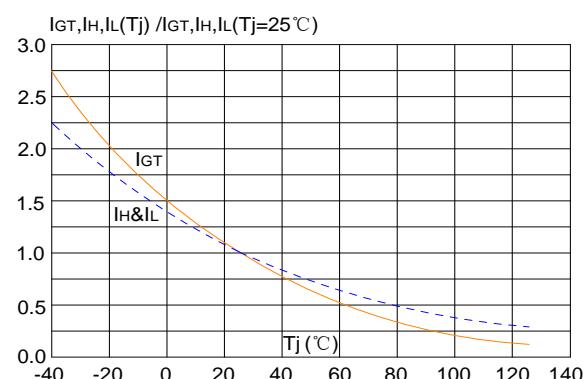

Package Mechanical Data :

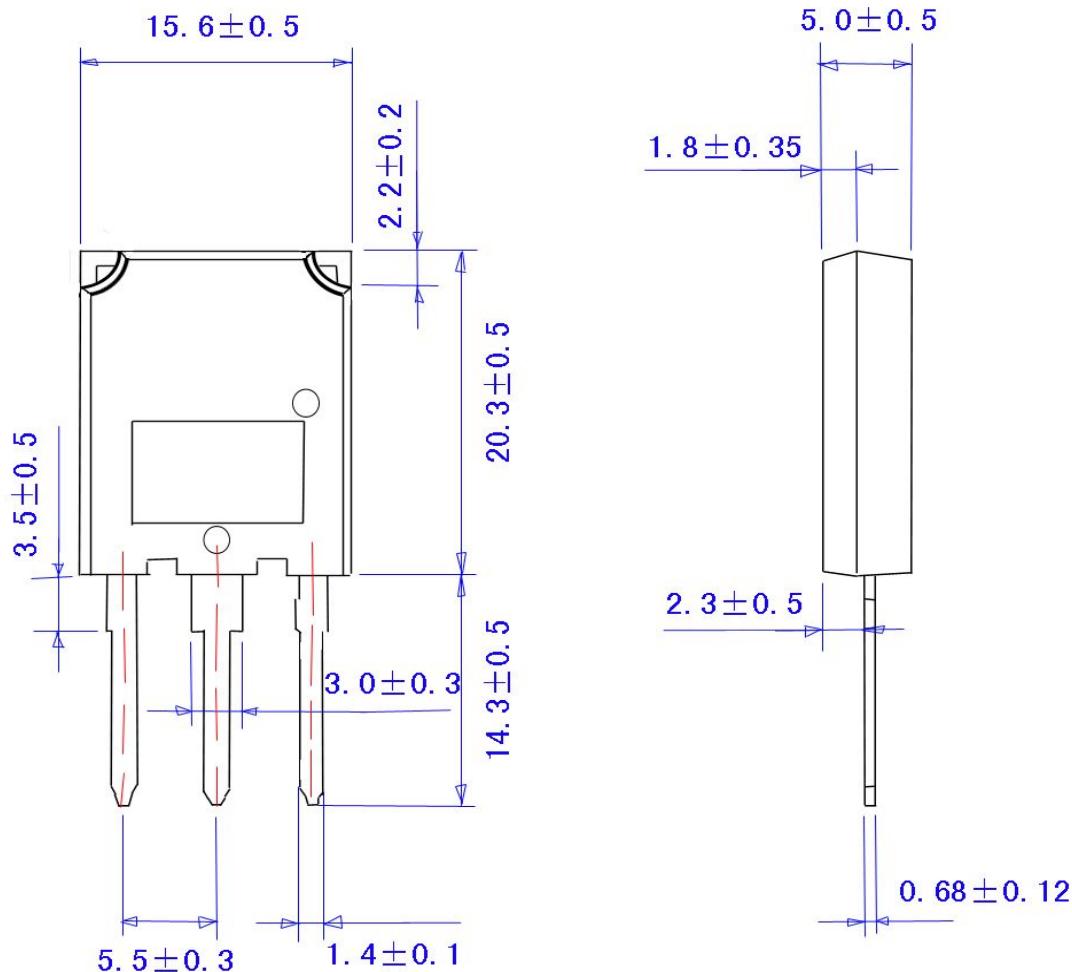

Ordering Information:

BTB <u>Triacs non-insulated</u> <u>IT(RMS):60A</u>	<u>60</u>	<u>-1200</u>	<u>B</u>	<u>B : IgT1-3 ≤ 50mA</u>
				600: $V_{DRM}/V_{RRM} \geq 600$
				800: $V_{DRM}/V_{RRM} \geq 800$
				1200: $V_{DRM}/V_{RRM} \geq 1200$
				1600: $V_{DRM}/V_{RRM} \geq 1600$