

Product Manual


EKWIN ELECTRONICS CO.,LTD

EK T16xxH

www.ekwin.net


High junction temperature TRIACS
T16xxH series
Main Features:

I_{T(RMS)}	V_{DRM/V_{RRM}}	V_{TM}
16 A	600V and 800 V	≤ 1.55 V

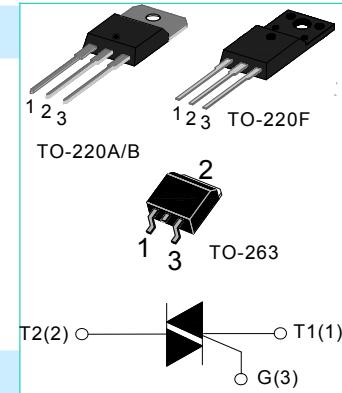
Description:

High current density due to single mesa technology; Glass Passivation.guaranteed maximum junction temperature150°C T16xxH series triacs is suitable for general purpose AC switching .They can be used as an ON/OFF Function in applications such as static relays,heating regulation motor stating circuits...or for phase control operation light dimmers,motor speed controllers.T16xxH series are 3 Quadrants triacs.They are specially recommended for use on inductive loads

Absolute Ratings(limiting values) :

Symbol	Parameter	Value	Unit
T_{stg}	Storage junction temperature range	- 40 to + 150	°C
T_j	Operating junction temperature range	- 40 to +150	°C
I_{T(RMS)}	RMS on-state current	16	A
	TO-220A/F(Ins) (TC=96°C)		
	TO-220B (TC=110°C)		
	TO-263 (TC=115°C)		
I_{TSM}	Non repetitive surge peak on-state current (full cycle, F=50Hz)	160	A
V_{DRM}	Repetitive peak off-state voltage(Tj =25°C)	600 and 800	V
V_{RRM}	Repetitive peak reverse voltage(Tj =25°C)	600 and 800	V
V_{DSM}	Non repetitive surge peak Off-state voltage	V _{DRM} + 100	V
V_{RSM}	Non repetitive peak reverse voltage	V _{RRM} + 100	V
I²t	I ² t value for fusing tp = 10 ms	144	A ² s

dI/dt	Critical rate of rise of on-state current ($I_G = 2 \times I_{GT}$)	50	A/ μ s
I_{GM}	Peak gate current	4	A
P_{G(AV)}	Average gate power dissipation	1	W
P_{GM}	Peak gate power	5	W

Electrical Characteristics : (T_j=25°C unless otherwise specified)

Symbol	Test Condition	Quadrant	Range	Value				Unit
				T1610H	T1620H	T1635H	T1650H	
I_{GT}	V _D =12V R _L =33Ω	I-II-III	MAX	10	20	35	50	mA
V_{GT}		I-II-III	MAX	1.5				V
V_{GD}	V _D =V _{DRM} R _L =3.3kΩ T _j =150°C	I-II-III	MIN	0.2				V
I_L	I _G =1.2 I _{GT}	I-III	MAX	20	40	50	80	mA
		II		35	55	70	100	
I_H	I _{TM} = 100mA		MAX	20	30	45	70	mA
dV/dt	V _D =2/3V _{DRM} R _{GK} =1kΩ T _j =150°C		MIN	200	500	1000	1500	V/ μ s
(dV/dt)c	(dI/dt)c=-5.3A/ms T _j =150°C		MIN	1	5	15	25	V/ μ s

Static Characteristics

Symbol	Parameter		Value(MAX)	Unit
V_{TM}	I _{TM} =22.5A tp= 380 μ s	T _j =25°C	1.55	V
I_{DRM} I_{RRM}	V _D =V _{DRM} , V _R =V _{RRM}	T _j =25°C	10	μ A mA
		T _j =150°C	4	

Thermal Resistances :

Symbol	Parameter		Value	Unit
R_{th(j-c)}	Junction to case for AC	TO-220A/F(Ins) (TC=96°C)	2.3	°C/W
		TO-220B (TC=110°C)	1.2	
		TO-263 (TC=115°C)	0.97	

FIG.1:Maximum power dissipation versus RMS on-state current(full cycle)

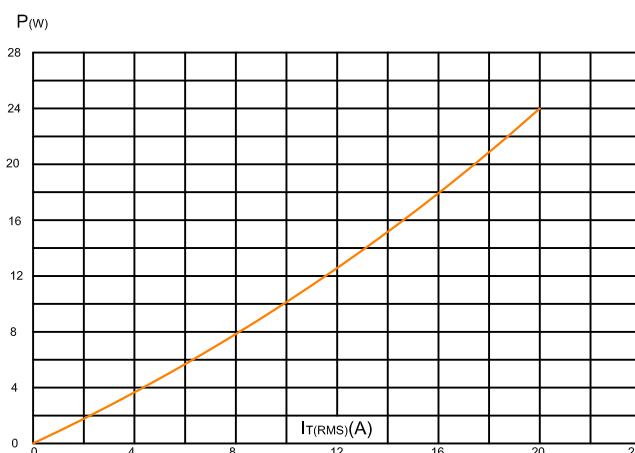


FIG.3:On-state characteristics (maximum values).

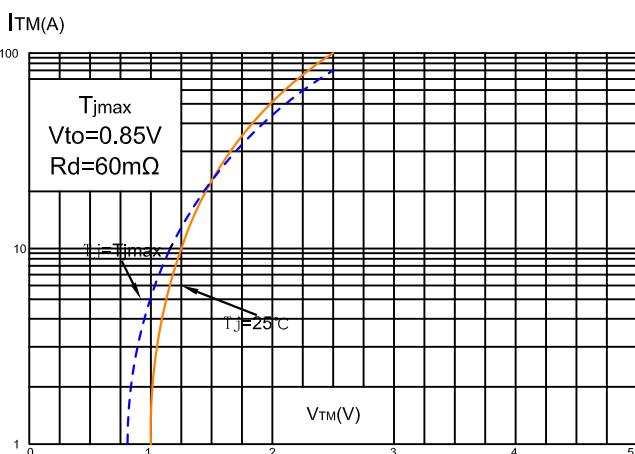


FIG.5:Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10\text{ms}$,and corresponding value of I^2t .

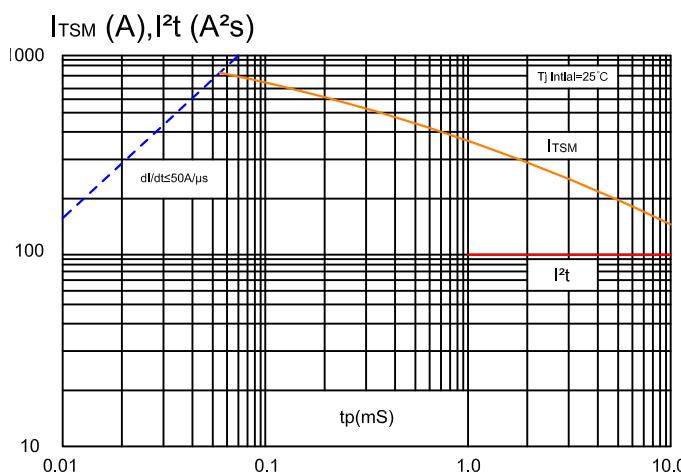


FIG.2:RMS on-state current versus case temperature(full cycle)

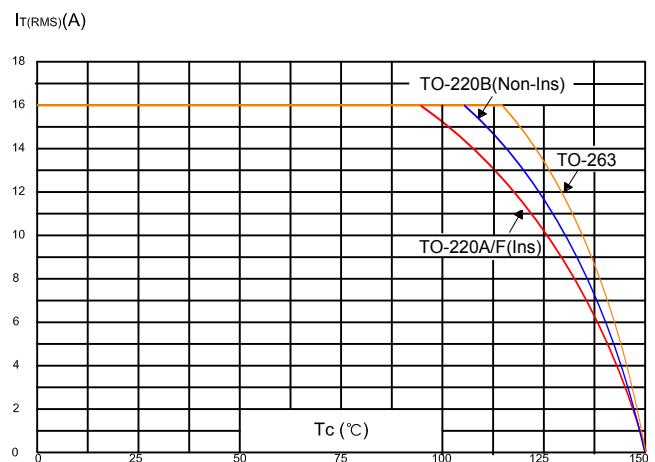


FIG.4:Surge peak on-state current versus number of cycles.


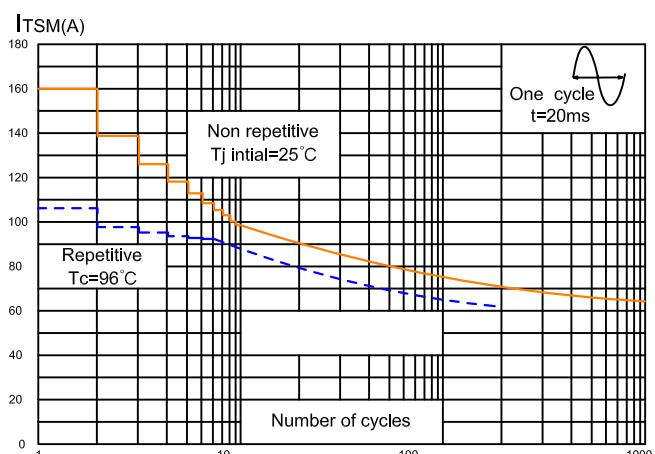



FIG.6:Relative variations of gate trigger current,holding current and latching current versus junction temperature(typical values)

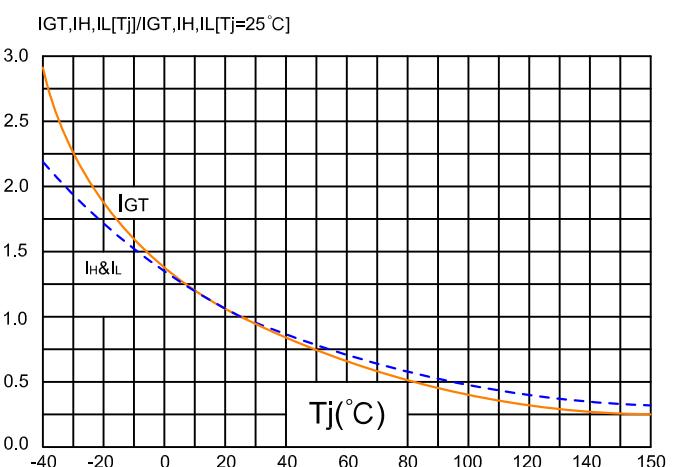


Ordering Information:

T	16	10	H	6	F
TRIAC SERIES					
$I_{T(RMS)}: 16A$					
10: $I_{GTO-3} \leq 10mA$					
20: $I_{GTO-3} \leq 20mA$					
35: $I_{GTO-3} \leq 35mA$					
50: $I_{GTO-3} \leq 50mA$					
TO-220F					
$6V_{DRM}/V_{RRM} \geq 600$					
$8V_{DRM}/V_{RRM} \geq 800$					
High junction temperature					


Package Mechanical Data :

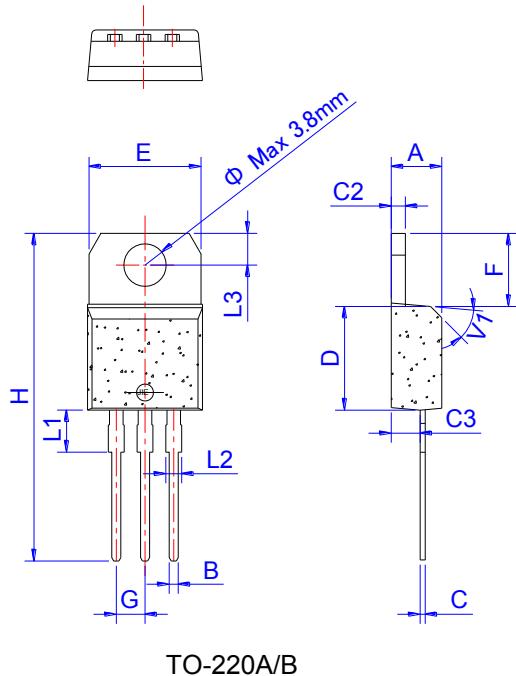

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.60	0.173		0.181
B	0.61		0.88	0.024		0.035
C	0.46		0.70	0.018		0.028
C2	1.21		1.32	0.048		0.052
C3	2.40		2.72	0.094		0.107
D	8.60		9.70	0.339		0.382
E	9.60		10.4	0.378		0.409
F	6.20		6.60	0.244		0.260
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.75			0.148	
L2	1.14		1.70	0.045		0.067
L3	2.65		2.95	0.104		0.116
V1		45°			45°	

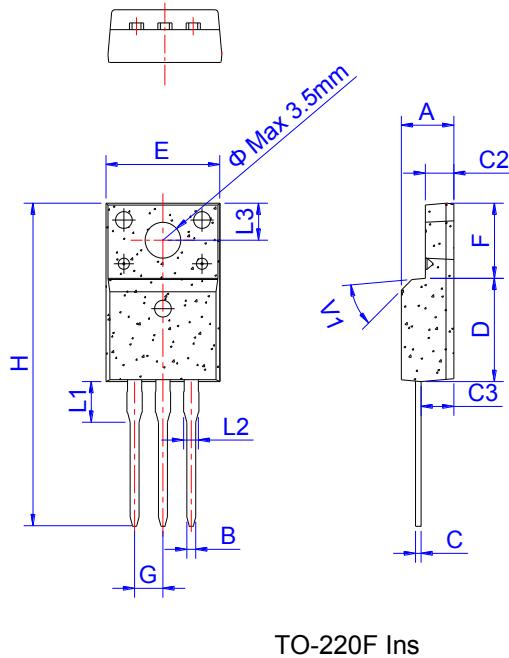

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.80	0.173		0.189
B	0.74	0.80	0.83	0.029	0.031	0.033
C	0.48		0.75	0.019		0.030
C2	2.40		2.70	0.094		0.106
C3	2.60		3.00	0.102		0.118
D	8.80		9.30	0.346		0.366
E	9.70		10.3	0.382		0.406
F	6.40		7.00	0.252		0.276
G		2.54			0.1	
H	28.0		29.8	1.102		1.173
L1		3.63			0.143	
L2	1.14		1.70	0.045		0.067
L3		3.30			0.130	
V1		45°			45°	

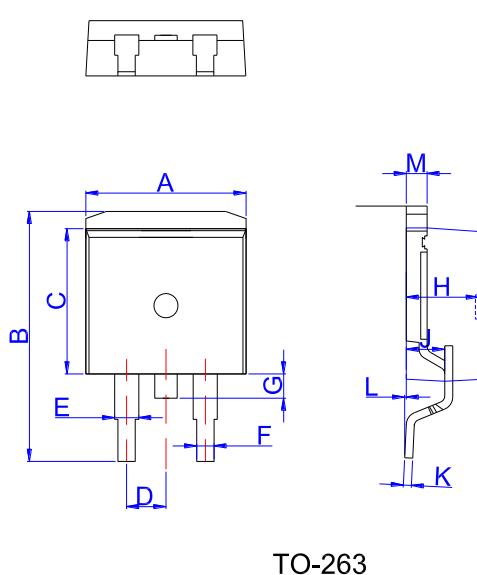

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.4		9.6	0.37		0.378
D		2.54			0.100	
E	1.20		1.40	0.047		0.055
F	0.75		0.85	0.029		0.033
G			1.75			0.069
H	4.40		4.70	0.173		0.185
J	2.30		2.70	0.091		0.106
K	0.38		0.55	0.015		0.022
L	0	0.10	0.25	0	0.004	0.010
M	1.25		1.35	0.049		0.053